

INVERTER MULTI-SPLIT SYSTEM

SRR-ZM


Ceiling Concealed type

NEW



OPTION

Item	Contents	Option No.
Bottom air inlet kit	①+②	UT-BAT1EF

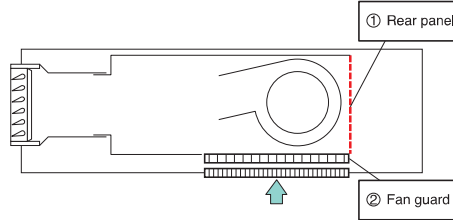

Wired remote control (option)



RC-EX1A

RC-E5

Wireless remote control



Standard equipment

FUNCTION



Comfortable Functions



Convenient & Economy Functions



Maintenance & Prevention Functions



Others



SPECIFICATIONS

Item	Model	SRR25ZM-S	SRR35ZM-S	SRR50ZM-S	SRR60ZM-S	
Nominal cooling capacity	kW	2.5	3.5	5.0	6.0	
Nominal heating capacity	kW	3.4	4.5	5.8	6.8	
* Sound power level	Cooling	dB(A)	56	57	59	60
	Heating	dB(A)	59	60	61	63
* Sound pressure level	Cooling(Hi/Me/Lo/Ulo)	dB(A)	37 / 33 / 30 / 24	38 / 34 / 31 / 25	41 / 37 / 34 / 29	44 / 38 / 35 / 30
	Heating(Hi/Me/Lo/Ulo)	dB(A)	40 / 37 / 34 / 28	41 / 38 / 35 / 29	43 / 39 / 37 / 32	45 / 41 / 38 / 33
Air flow	Cooling(Hi/Me/Lo/Ulo)	m ³ /min	9.5 / 8.5 / 6.5 / 4.5	10.0 / 8.5 / 7.0 / 5.0	13.5 / 11.0 / 10.0 / 7.5	14.5 / 11.5 / 10.5 / 8.0
	Heating(Hi/Me/Lo/Ulo)	m ³ /min	10.0 / 9.0 / 8.0 / 6.0	10.5 / 9.5 / 8.5 / 6.5	14.5 / 12.5 / 11.0 / 8.5	15.0 / 13.0 / 11.5 / 9.0
Exterior dimensions(HXWXD)	mm	200X750X500		200X950X500		
Net weight	kg	20.5				
Ref. piping size	Liquid / Gas	φ mm 6.35(1/4") / 9.52(3/8")		6.35(1/4") / 12.7(1/2")		
Air filter		Standard equipment				

The data are measured under the following conditions (ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.
* Indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.

FDTC-VF

4way Ceiling Cassette type

Fits into standard
600 x 600 ceiling



Wired remote control (option)



RC-EX1A

RC-E5

RCH-E3

Wireless remote control (option)



RCN-TC-24W-ER

FUNCTION

Comfortable Functions



Comfortable Air Flow Functions



Convenient & Economy Functions



Maintenance & Prevention Functions



Others



SPECIFICATIONS

Item	Model	FDTC25VF	FDTC35VF	FDTC50VF	FDTC60VF	
Nominal cooling capacity	kW	2.5	3.5	5.0	6.0	
Nominal heating capacity	kW	3.4	4.5	5.8	6.8	
* Sound power level	Cooling	dB(A)	56	58	60	60
	Heating	dB(A)	56	58	60	60
* Sound pressure level	Cooling(Hi/Me/Lo)	dB(A)	36 / 32 / 29	40 / 36 / 30	42 / 36 / 30	46 / 39 / 30
	Heating(Hi/Me/Lo)	dB(A)	38 / 33 / 29.5	42 / 35 / 32	42 / 36 / 32	46 / 39 / 32
Air flow	Cooling(Hi/Me/Lo)	m ³ /min	9.0 / 8.0 / 6.5	9.5 / 9.0 / 7.0	11.5 / 9.0 / 7.0	13.5 / 10.0 / 7.0
	Heating(Hi/Me/Lo)	m ³ /min	9.5 / 8.5 / 7.0	10.0 / 9.0 / 8.0	11.5 / 9.0 / 8.0	13.5 / 10.0 / 8.0
Exterior dimensions (HXWXD)	Main unit	mm	248X570X570			
	Panel	mm	35X700X700			
Net weight	Unit	kg	15			
	Panel	kg	3.5			
Ref. piping size	Liquid / Gas	φ mm 6.35(1/4") / 9.52(3/8")		6.35(1/4") / 12.7(1/2")		

The data are measured under the following conditions (ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.
* Indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.

* Powerful Hi-cap can be selected. Sound level(dB(A)):25VF(Cooling:38 Heating:39) 35VF(Cooling:41 Heating:42) 40/50/60VF(Cooling:47 Heating:47). Air flow m³/min:25VF(Cooling:10 Heating:10.5) 35VF(Cooling:11